


Flat Flexible Cables and Flat Cable Assemblies

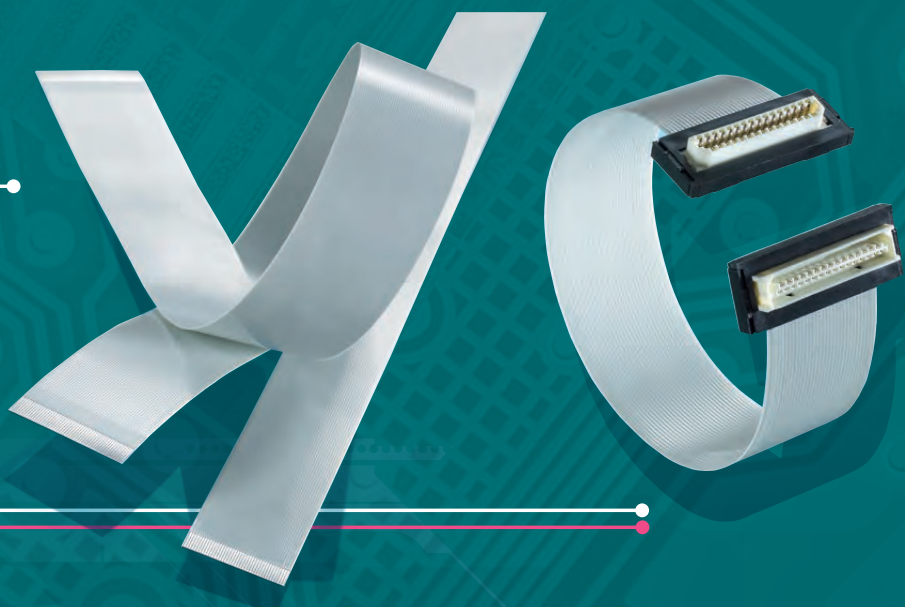

Contents

General Information

Flat Flexible Cables AXOJUMP™

- 0.30 mm pitch Flat Flexible Cables: miniature versions
- Identification code

- 0.50, 1.00 and 1.25 mm pitch, 100 micron conductors: standard versions
- Identification code

- 0.50, 1.00 and 1.25 mm pitch, 50 and 35 micron conductors: flexible & extra-flexible versions
- Identification code

- 1.00 pitch, 25 micron conductors: ultra-flexible versions
- Identification code

- Shielded Flat Flexible Cables
- Identification code

Flat Cables with round pins AXOSTRIP™

- Identification code

2

Bulk Flat Flexible Cables FLEXLINK®

40

12

- Standard bulk Flat Cables
- Identification code
- Custom-designed cables for switch rotary connectors

40

41

42

12

15

Flat Display Connections AXOLINK™

43

- Identification code

48

16

20

Flat Display Connections for High Speed transmission: LVDS

49

- Identification code

55

21

25

Flat Display Connection for High Speed (LVDS): FDC 100® Flexible version

56

- Identification code

59

26

29

30

34

35


39





General Information

AXON', manufacturer of cables and interconnect solutions for advanced technologies, offers a complete range of Flat Cables and Assemblies :

- 
- › FFC-Flat Flexible Cables
AXOJUMP™,
 - › Flat Cables with round pins
AXOSTRIP™,
 - › Bulk Flat Flexible Cables
FLEXLINK®,
 - › FDC-Flat Display Connections
AXOLINK™.
 - › Flat Display Connections
for High Speed (LVDS)
transmission
FDC 100®.

From standard Flat Cables to custom designed Assemblies, AXON' offers a wealth of expertise to meet challenging customer requirements.

FFC- Flat Flexible Cables: AXOJUMP™

Designed for board-to-board interconnections, AXOJUMP™ standard Flat Flexible Cables are made up of flat conductors insulated with Polyester or Polyimide tapes (from 0.30 mm to 1.25 mm pitch).

AXON' has developed a wide range of custom designed Flat Flexible Cables incorporating folds, shields, notches, punching, slitting and marking.

The termination of Flat Flexible Cables is made either:

- with ZIF (Zero Insertion Force) / LIF (Low Insertion Force) connectors: the cables are equipped with reinforcement tape to strengthen the ends,
- by soldering.



FLAT FLEXIBLE CABLES FOR LIF CONNECTOR

Flat Cables with round pins: AXOSTRIP™


AXOSTRIP™ - Flat Cables with round pins can be soldered or inserted to achieve board-to-board interconnections.



FLAT CABLES WITH ROUND PINS

Bulk Flat Flexible Cables: FLEXLINK®

FLEXLINK®-Bulk Flat Flexible Cables are made with flat conductors insulated with Polyester film. They are used for any application where space reduction and flexibility are the most important criteria. The termination of Flat Bulk Cables is made with crimped contacts.

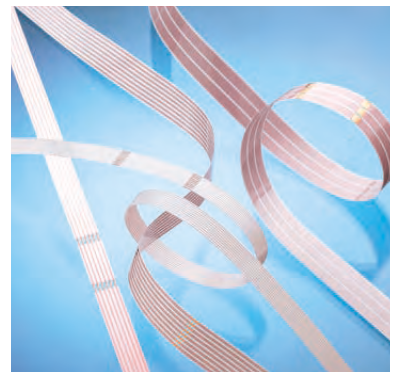

BULK FLAT FLEXIBLE CABLES

FDC- Flat Display Connections: AXOLINK™


AXOLINK™-FDC-Flat Display Connections have been designed for board to display interconnections. They consist of AXOJUMP™ standard Flat Flexible Cables and connectors such as: DF-9, DF-19, FI-SE, FI-X at one or both ends.

Flat Display Connections for High Speed (LVDS) transmission: FDC 100®

A special range called FDC 100® has also been developed for connecting full HD displays with LVDS (Low Voltage Differential Signaling). This assembly consists of a 21, 31, 41 or 51 way 0.50 mm pitch shielded flat cables, terminated with connectors compatible with the board-mount FI-R connectors. Cables are compatible with ZIF Molex and FH41 Hirose connectors.



FDC-FLAT DISPLAY CONNECTIONS



Applications


AXON' Flat Cables and Assemblies can be used in numerous application areas:

- **Automotive industry**
car radios, GPS systems, switch rotary connectors, headliners, door panels.
- **Medical applications**
- **Consumer electronics**
CD and DVD players, TV, LCD displays, hi-fi systems, satellite receivers and decoders.
- **Telecommunications**
telephones, fax machines.
- **IT equipment**
notebooks, scanners, printers.
- **Household equipment**
glass-ceramic cooking plates, refrigerators, dishwashers.
- **Military electronics**
missiles, weapon systems.
- **Robotic applications**
- **Aeronautics**
LCD displays, electronic devices.

Advantages

AXON' Flat Cables and Assemblies offer many advantages:

- Extremely small dimensions:
low profile - narrow width - fine pitch,
- Simple and fast installation:
time saving - cost reduction,
- Compatible with ZIF/LIF connectors,
- Excellent flexibility and flex-life,

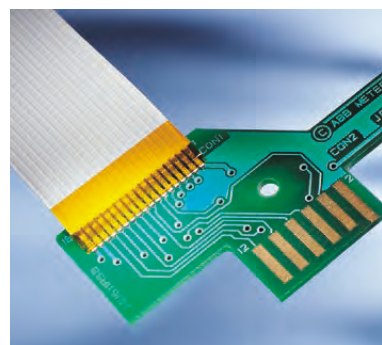

CONNECTION BY SOLDERING



FLAT DISPLAY CONNECTION

Production

AXOJUMP™ Flat Flexible Cables are manufactured in AXON's production sites in Europe and Asia, using state-of-the-art manufacturing equipment.

AXON' specialises in FFC manufacturing ranging from wire drawing, plating and rolling of conductors to insulation, final cutting and shielding.

Conductor manufacturing

AXON' manufactures its own flat conductors. The main materials used are:

- Bare copper,
- Tin alloy plated copper,
- Gold plated copper.

AXON's expertise in conductors allows for a wide range of flat cables with different levels of flexibility.

The modern manufacturing equipment allows perfect dimensional precision, electrical resistance control and production of long continuous lengths.

Cable insulation

AXON' insulates the conductors with laminated Polyester or Polyimide tapes.

Packaging

Each container is marked with the following:

- AXON'CABLE.
- Reference of the product.
- Batch number.
- Quantity.

Storage conditions

- Pieces packaged in original packaging.
- Temperature: -20°C to 40°C.
- Relative humidity: 70 % max.
- Storage duration:
 - 1 year max. (tin plated conductors).
 - 3 years max. (gold plated conductors).



FLAT COPPER CONDUCTOR



BULK FLAT FLEXIBLE CABLE PRODUCTION



FLAT CABLE WORKSHOP



Quality assurance

AXON' is accredited to:

- ISO 9001,
- IATF 16949,
- ISO 14001,
- EN 9100,
- ISO 13485,
- ISO 45001.

AXON's continuous improvement plan called "SOLON" is based on the EFQM model (European Foundation for Quality Management).

In addition to in-line controls throughout the manufacturing area, AXON' applies "Statistical Process Control" methods (SPC) as well as standard problem solving and continuous improvement methods. TPM (Total Productive Maintenance) is applied in order to improve productivity.

AXON' conforms to the latest RoHS European Directives and REACH regulation. Please consult our website for the latest information:

www.axon-cable.com/Customer Area/RoHS and EU directives.

In addition, AXON's products have been recorded in the IMDS database (International Material Data System) since 2003, in which the make-up of product is indicated.

Design, Research, Innovation and Development

At the company's headquarters, as well as in each country where AXON' has a subsidiary - Germany, Great Britain, USA, Latvia, Hungary, China, Mexico, India, Brazil - engineering teams provide local technical support.

The Research and Development Department located in France concentrates on the following areas:

Metal technologies

- Metal plating of the conductors,
- Drawing - Laminating - Annealing.

Plastics technology


- Insulation - Jacketing,
- Moulding - Overmoulding.

Electronics


- EMI/EMC,
- RF and high speed data.

Interconnection technology

- Soldering,
- Welding,
- Contact crimping
- Connectors.

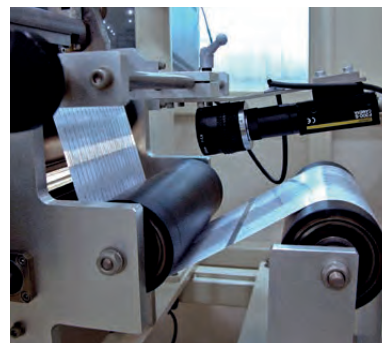

IN-LINE CONTROLS

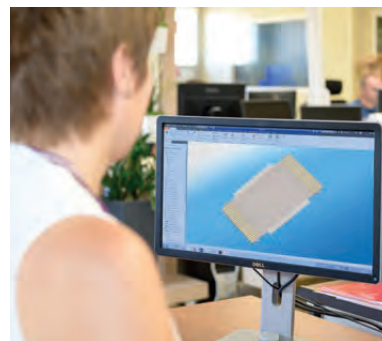

ENGINEERING DEPARTMENT

Connection

Connection with connectors

AXON' flat cables are designed for LIF (Low Insertion Force) or ZIF (Zero Insertion Force) connectors from most connector manufacturers.

Connection with crimped contacts

1.27 and 2.54 mm pitch FFC's can be terminated with crimped contacts or provided ready for crimping.

Connection with soldering


Reflow soldering is suited for termination of flat cables to printed circuit boards.

AXON' uses a semi-automatic hot bar soldering process to manufacture FFC/PCB connections. The two parts are assembled using a thermode.

► Recommended PCB configuration


- Tin thickness on the soldering pads:
5 to 8 μm for 0.5 and 0.8 mm pitch FFC.
10 to 15 μm for 1.00 and 2.54 mm pitch FFC.
- Tinning material: tin alloy.

The hot bar soldering process

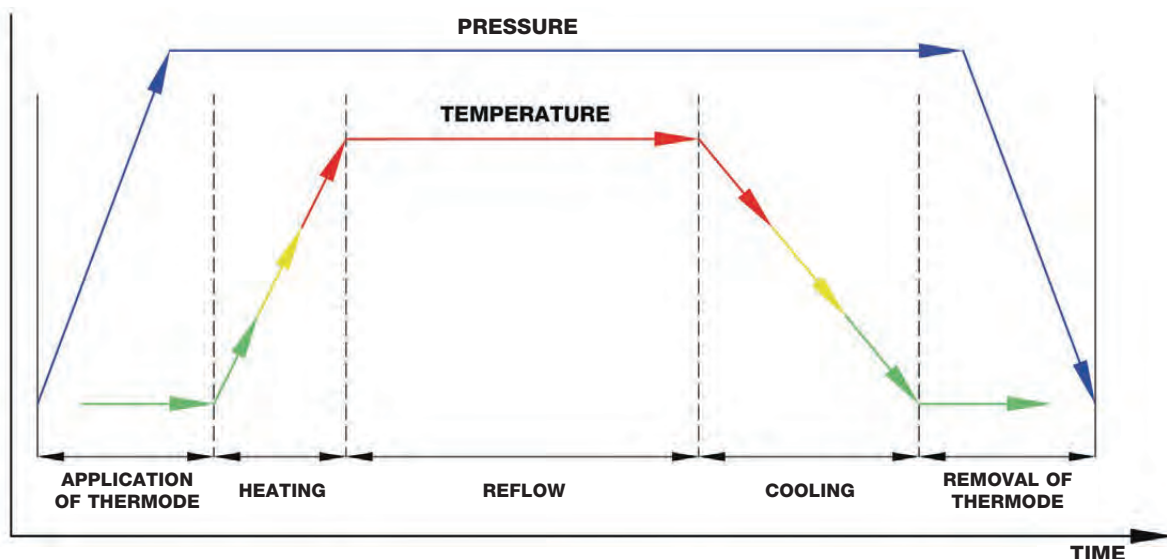

Connection with connectors

AXON' offers flat cables for connectors with a locking system. Specially punched FFC's maximise stability. Used with a robust housing, it prevents warping.

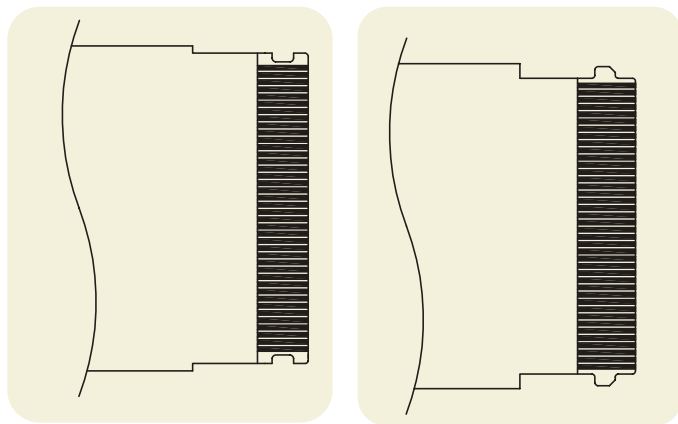

AXON' punching process is camera-driven for a very high degree of precision.

AXON' can develop specific punched shapes as required.

Shielding expertise

AXON' offers shielded flat cables with aluminium tape. The company is able to ground one or several conductors to the shield (same voltage level and EMI performance).

To characterize the shielding of flat or round cables, AXON' uses the "Transfer Impedance Z_T " parameters, expressed in ohms/m. As this notion depends on the type of product, rather than on the application, it is better suited to accurately characterize shielding performance than the alternative notion of "shielding efficiency", given in dB.

AXON' is equipped with comprehensive test benches to characterize transfer impedance of round and flat cables as well as terminated harnesses.

Measurement of the shield resistance

Shielding efficiency is measured on a network analyser using the microstrip method.

The connection between the cable and the coaxial cable of the network analyser is made possible with an interface PCB which links the flat cable's ZIF connectors to the coaxial connectors.

AXON's standard shielded FFC's are usually used for static applications. For dynamic applications, please contact us for more details.




SHIELDED FLAT FLEXIBLE CABLES



MICROSTRIP INJECTION TEST BENCH TO CONTROL TRANSFER IMPEDANCE

Shielding efficiency

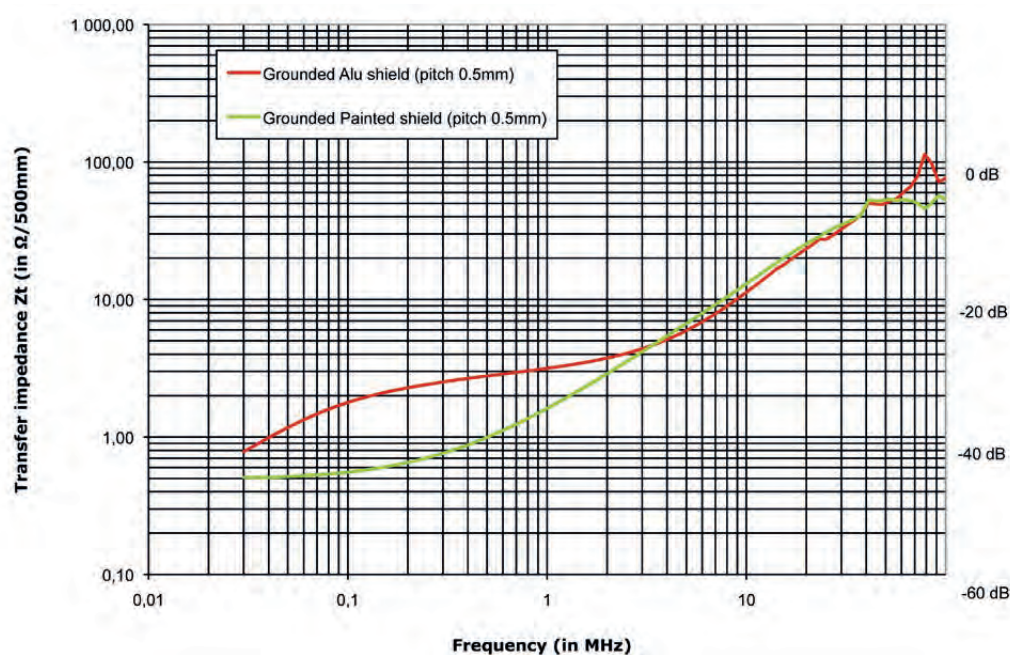

This graph shows the shielding efficiency of two different cables in terms of transfer impedance. The lower the transfer impedance (Z_T) the more efficient the shielding.


Flex-life

The flex-life of AXON' FFC's depends on the choice of conductor/insulation tape combination.


To meet the different requirements of flex life in dynamic applications, AXON' offers a range of FFC's to withstand an increasing number of flex cycles.


The sample is fitted between two plates. The bottom plate slides back and forth and the top one remains still. The cycle is repeated until the first conductor breaks.

The performance of our cables are defined in the datasheets in this brochure.

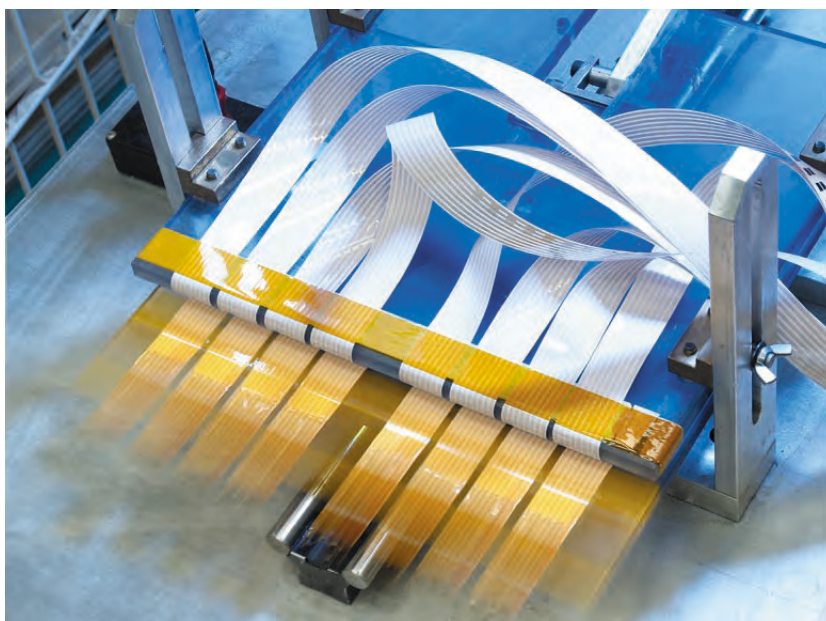

FLEX-LIFE TEST

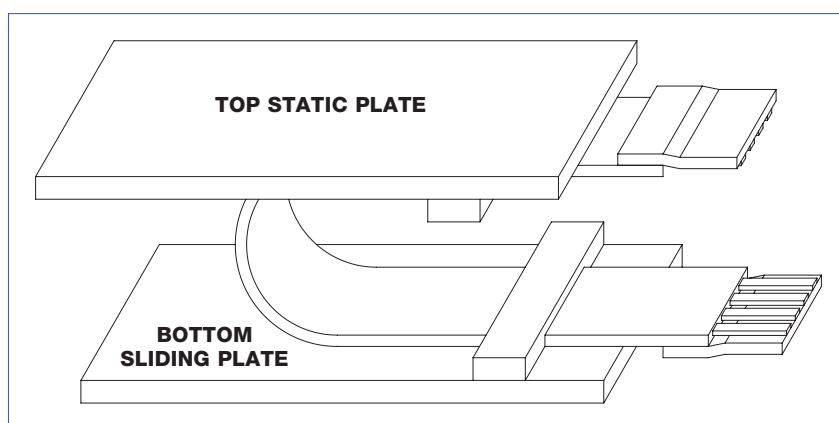



Gold plated Flat Flexible Cables

AXON' offers flat cables with a fine gold coating over nickel on the stripped ends. Gold coating guarantees the absence of tin whiskers. *Whiskers are filaments or knots which can grow from metal such as tin after several months, with the risk of producing short circuits between fine pitch conductors.* AXON' can offer stripped gold plated flat cables in different pitches compatible with a large range of gold contact connectors.

These gold plated cables have been designed for board-to-board interconnections in miniaturised electronic products, which require fine pitch flat cables.

Gold Plated stripped ends are coated with:

- nickel, 0.3µm min.
- and gold, 0.05µm min.

The nickel coating is a barrier to avoid the migration of gold into the copper. It also improves the protection of the conductors against corrosion.

Thanks to a flexible manufacturing process, AXON' can offer different thicknesses of nickel and gold plating depending on the application.

AXON' gold plated cables successfully withstand salt spray testing.

Tin plated Flat Flexible Cables

AXON' offers tin plated conductors using tin alloy to reduce whiskers risk.

Tin plating is compatible with all connectors using tin plated contacts or soldering technologies.




GOLD PLATING AT EXPOSED ENDS

Custom-designed Flat Flexible Cables

AXON' is able to offer custom-designed Flat Flexible Cables such as :

- Ultraflex,
- 2.54 mm pitches,
- Hybrid pitches,
- Special reinforcement, (easy-to-insert, colour, ...),
- 300V cables,
- Black cables,
- Printed line on the cable to help for connector assembly.
- Folds,
- Specific printing on the insulation,
- Adhesive tapes for fixation.

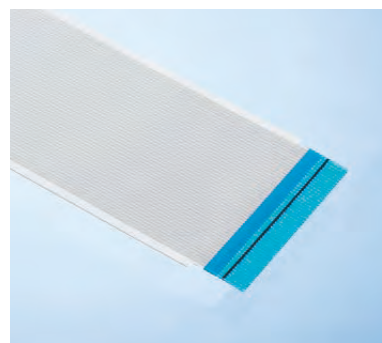

CUSTOM-DESIGNED FLAT FLEXIBLE CABLES WITH PRINTED LINE

Flat Cables

FFC-Flat Flexible Cables AXOJUMP™

Designed for board-to-board interconnections in electronic systems, Axojump™ Flat Flexible Cables (FFC) are made up of flat tin or gold plated copper conductors insulated with Polyester or Polyimide tapes. From 0.30 mm pitch for space saving to 1.25 mm, a large variety of pitches is available to suit your needs. In addition to the standard range, AXON' has developed custom designed flat flex cables incorporating folds, shields, notches, punching, slitting or marking. Flat Flexible Cables are compatible with ZIF and LIF connectors.



0.30 mm pitch Flat Flexible Cables

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 30V AC.

Conductor

Pitch: 0.30 mm.

Width: 0.20 ± 0.015 mm.

Conductor thickness: 0.035 mm typical value.

Max. conductor resistance: 2800 (Ω /km) at 20°C.


Conductor plating

Gold: 0.3 μ m Ni (mini) / 0.05 μ m Au.

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

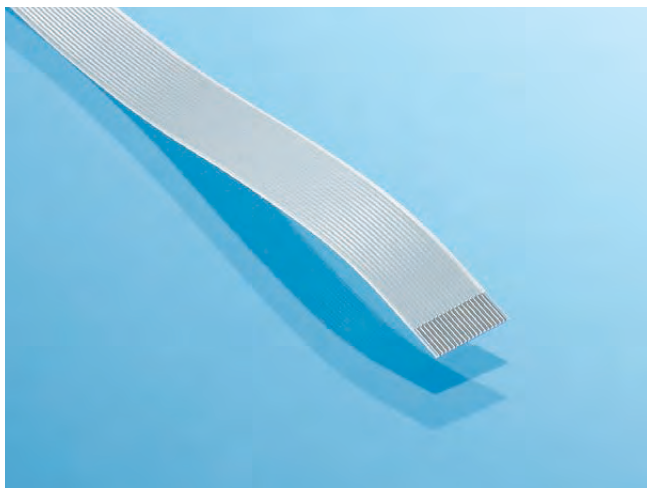

0.30 MM PITCH STANDARD FLAT FLEXIBLE CABLE.


Connection scheme

With ZIF connectors

- Reinforcement tape: Polyester L code.
- Blue colour.



General drawing

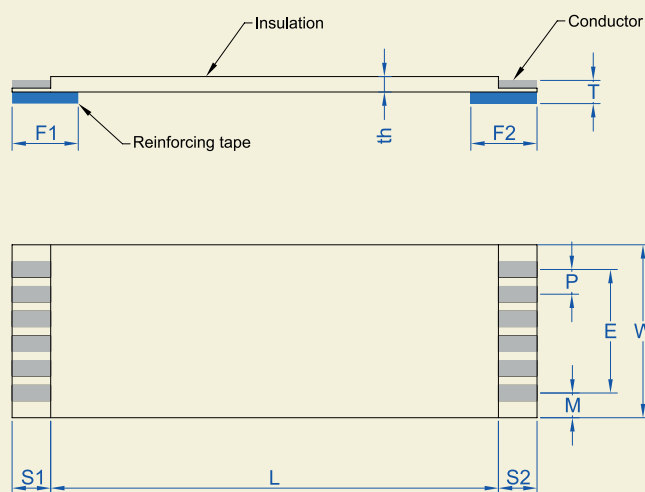


0.30 mm pitch Flat Flexible Cables

Processing forms



Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.

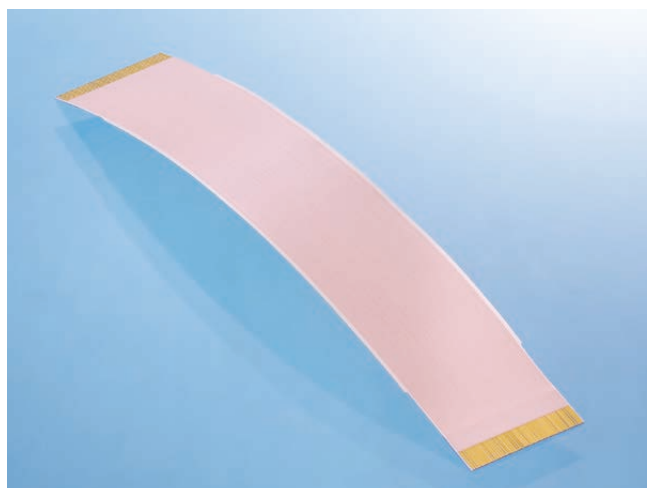

0.30 MM PITCH GOLD PLATED FLAT FLEXIBLE CABLE.

Dimensions


Pitch: P (mm)	0.30 ± 0.03
Number of conductors: N	11 to 51
Span: E (mm)	$(N-1) \cdot 0.30 \pm 0.03$
Width: W (mm) (on connection area)	$(N+1) \cdot 0.30 \pm 0.03$
Margin: M (mm)	0.30 ± 0.05
Strip length: S1-S2 (mm)	4.00 ± 0.80
Reinforcement length: F1-F2 (mm)	8.00 ± 2.00
Insulated length: L (mm)	42 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4 201 to 500 ± 5
Thickness at end of cable: T (mm)	0.20 ± 0.03
Cable thickness: th (mm)	0.12 (typical value)

0.30 mm pitch Flat Flexible Cables

Electrical properties

	Testing conditions	Values
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	100
Current rating (A) - Max	FFC at 23°C Allowable temperature rise : 40°C	0.30
Insulation resistance (M Ω .m min)	Conductor to conductor	10 at DC 100V
Continuity test	DC 3.0 V at 0.1mA	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	145 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	70 pF/m

Other properties

	Testing conditions	Characteristics	
Heat resistance	113°C, 168 hours	Dielectric test Insulation resistance	Passed Passed
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: $\varnothing = 0.50$ mm	Dielectric test Insulation resistance: After 500 cycles	Passed
Flame resistance	UL 758	VW-1	Passed
Folding	The specimen is folded manually at 180°	Continuity after more than 20 times	Passed
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius 10 mm	500 000

0.30 mm pitch Flat Flexible Cables

Identification code

FFC 0.30 A 25/0200 E 4.0-4.0-08.0-08.0 E A LL/AU

Option:

Plating on conductors

AU: gold plating

Reinforcement type (F1 & F2):

L: Polyester reinforcement

UL compliance:

A: No compliance

Conductor thickness: **E** (35 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **E**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat Flexible Cable

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors

Standard versions

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60V AC.

Conductor


Pitch (mm)	Width (mm)	Max conductor resistance (Ω/km) at 20°C	Conductor thickness (mm)
0.50	0.30 ± 0.02	730	0.10 ± 0.015
1.00	0.70 ± 0.03	300	0.10 ± 0.015
1.25	0.80 ± 0.03	280	0.10 ± 0.015



0.50 MM PITCH STANDARD FLAT FLEXIBLE CABLE

Conductor plating

Tin	0.4 µm mini
Gold	0.3 µm Ni mini / 0.05 µm Au

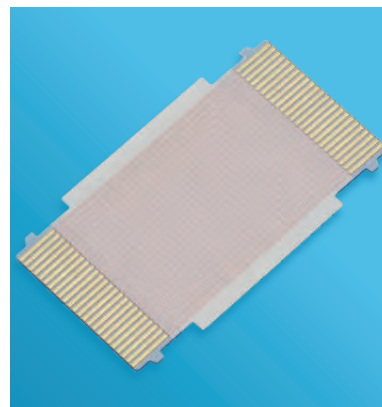

0.50 MM PUNCHED FLAT FLEXIBLE CABLE

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

Connection schemes

With ZIF connectors

Reinforcement tape: Polyester K code.
Blue colour.



Hot bar soldering

Reinforcement tape: Polyimide H code.
Natural colour (amber).




Manual soldering

Code for the end: T.
F1 ; F2 = 2.50 mm.



0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors


General drawing

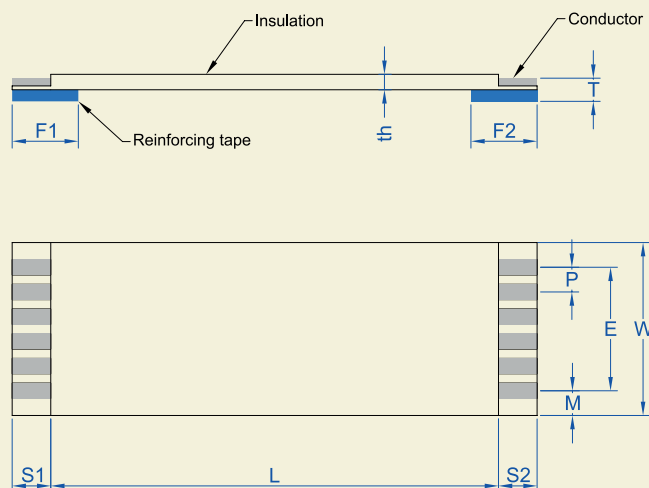

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


Pitch: P (mm)	0.50 ± 0.05	1.00 ± 0.08	1.25 ± 0.10
Number of conductors: N	6 to 80	4 to 60	4 to 60
Span: E (mm)	(N-1)*0.50 ± 0.07	(N-1)*1.00 ± 0.15	(N-1)*1.25 ± 0.15
Width: W (mm)	(N+1)*0.50 ± 0.06	(N+1)*1.00 ± 0.10	(N+1)*1.25 ± 0.15
Margin: M (mm)	0.50 ± 0.12	1.00 ± 0.20	1.25 ± 0.20
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)		
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)		
Insulated length: L (mm)	20 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4		
Thickness at end of cable: T (mm)	0.30 ± 0.05 (only for ZIF connectors)		
Cable thickness: t_h (mm)	0.25 typical		

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors


Electrical properties

	Testing conditions	Pitch		
		0.50	1.00	1.25
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	200	400	500
Current rating (A) - Max	FFC at 23°C Allowable temperature rise: 40°C	0.55	1.25	1.40
Insulation resistance (M Ω .m min)	Conductor to conductor	10 at DC 200V	10 at DC 400V	10 at DC 500V
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	130 Ω	120 Ω	130 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	62 pF/m	50 pF/m	30 pF/m


Other properties

	Testing conditions	Characteristics	
Heat resistance	136°C, 168 hours	Dielectric test Insulation resistance	Passed Passed
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: $\varnothing = 0.50$ mm	Dielectric test Insulation resistance: After 10 000 cycles	Passed
Flame resistance	UL 758	VW-1	Passed
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed
Flex-life (typical values)	speed 100 cycles /min Flex-life tests are performed at 23°C. 	Radius 10 mm	100 000 cycles

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 100 micron conductors

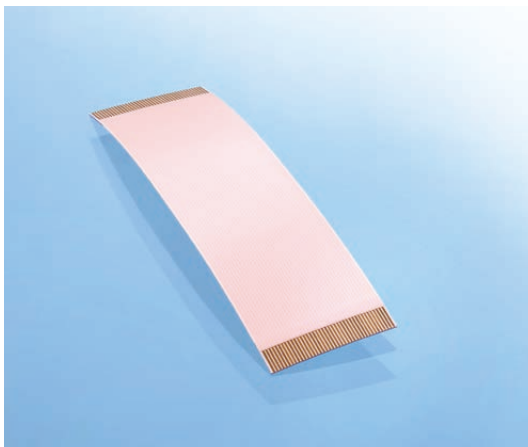

└ 0.50 MM PITCH GOLD PLATED FLAT FLEXIBLE CABLE

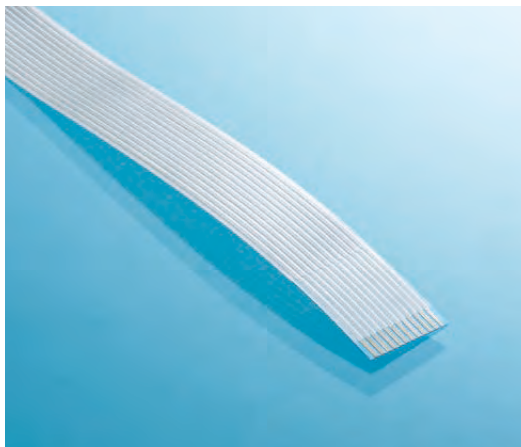

└ 1.00 MM PITCH TIN PLATED FLAT FLEXIBLE CABLE

UL compliance

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.






Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"

Special designs

Special designs available on request, such as specific shapes for connectors with locking systems.

Pitch: P (mm)	0.50	0.50	0.50	0.50	1.00
FFC Drawing					

*0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables
100 micron conductors*

Identification code

FFC 1.00 A 25/0200 B 4.0-4.0-08.0-08.0 S A KK/AU

Options:

Plating on conductors

-: tin plating

AU: gold plating

Reinforcement type (F1 & F2):

K: Polyester reinforcement

H: Polyimide reinforcement

T: Manual soldering

UL compliance:

A: Without UL marking

B: UL certified 20706

Conductor thickness: s

(100 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **B**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat Flexible Cable

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors

Flexible and extra-flexible versions

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60V AC.

Conductor

Pitch (mm)	Width (mm)	Max Conductor Resistance (Ω /km) at 20°C	
		Flexible (50 μ m)	Extra flexible (35 μ m)
0.50	0.30 \pm 0.02	1460	2200
1.00	0.70 \pm 0.03	550	790
1.25	0.80 \pm 0.03	480	710
Conductor thickness (typical value)		0.05 mm	0.035 mm

Conductor plating

Tin	0.4 μ m min
Gold	0.3 μ m Ni min / 0.05 μ m Au

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

Connection schemes

With ZIF connectors

Reinforcement tape: Polyester B code.

Blue colour.



Hot bar soldering


Reinforcement tape: Polyimide H code.

Natural colour (amber).



0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors


General drawing

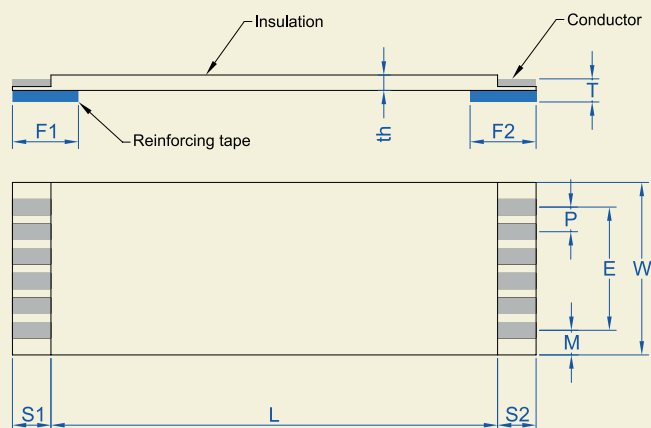

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


Pitch: P (mm)	0.50 ± 0.05	1.00 ± 0.08	1.25 ± 0.10
Number of conductors: N	6 to 80	4 to 60	4 to 60
Span: E (mm)	$(N-1) \cdot 0.50 \pm 0.07$	$(N-1) \cdot 1.00 \pm 0.15$	$(N-1) \cdot 1.25 \pm 0.15$
Width: W (mm)	$(N+1) \cdot 0.50 \pm 0.06$	$(N+1) \cdot 1.00 \pm 0.10$	$(N+1) \cdot 1.25 \pm 0.15$
Margin: M (mm)	0.5 ± 0.12	1.00 ± 0.20	1.25 ± 0.20
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)		
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)		
Insulated length: L (mm)	20 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4		201 to 3999 ± 5 4000 to 5999 ± 10 6000 to 9999 ± 15
Thickness at end of cable: T (mm)	0.30 ± 0.05 (only for ZIF connectors)		
Cable thickness: th (mm)	Flexible: 0.14 / Extra flexible: 0.12 (typical value)		

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors


Electrical properties

	Testing conditions	Pitch		
		0.50	1.00	1.25
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	200	400	500
Current rating (A) - Max Flexible conductor	FFC at 23°C Allowable temperature rise : 40°C	0.40	0.80	0.85
Current rating (A) - Max Extra flexible conductor		0.35	0.80	0.80
Insulation resistance (M Ω .m min)	Conductor to conductor	10 at DC 200V	10 at DC 400V	10 at DC 500V
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	150 Ω	150 Ω	170 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	50 pF/m	40 pF/m	35 pF/m


Other properties

	Testing conditions	Characteristics		
Heat resistance	136°C, 168 hours	Dielectric test Insulation resistance	Passed Passed	
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed	
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed	
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: \varnothing = 0.50 mm	Dielectric test Insulation resistance: After 500 cycles	Passed	
Flame resistance	UL 758	VW-1	Passed	
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed	
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed	
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius	5 mm	10 mm
		Flexible	300 000	2 500 000
		Extra flexible	700 000	5 000 000

0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables 50 and 35 micron conductors

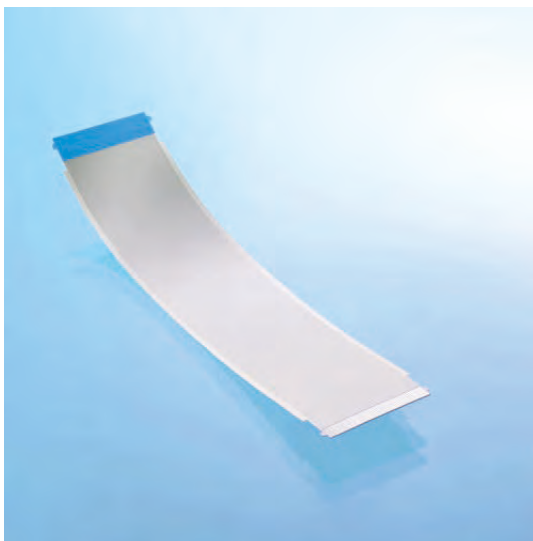

0.50 MM PITCH STANDARD FLAT FLEXIBLE CABLE

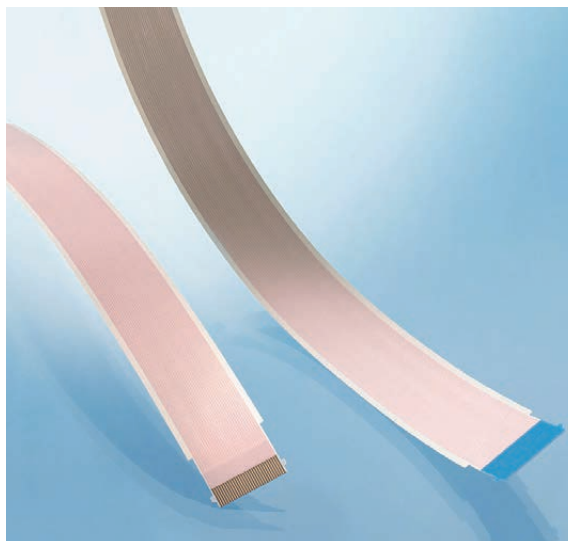

0.50 MM PITCH PUNCHED FLAT FLEXIBLE CABLE

UL compliance

With code A: the products are UL compliant.


With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.






Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"

Special designs

Special designs available on request, such as specific shapes for connectors with locking systems.

Pitch: P (mm)	0.50	0.50	0.50	0.50	1.00
FFC Drawing					

*0.50, 1.00 and 1.25 mm pitch Flat Flexible Cables
50 and 35 micron conductors*

Identification code

FFC 1.00 A 25/0200 E 4.0-4.0-08.0-08.0 F A BB/AU

Options:

Plating on conductors
-: tin plating

AU: gold plating

Reinforcement type (F1 & F2):

B: Polyester reinforcement

UL compliance:

A: Without UL marking

B: UL certified 20706

Conductor thickness:

F: Flexible (50 microns)

E: Extra flexible (35 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **E**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat Flexible Cable

1.00 mm pitch Flat Flexible Cables 25 micron conductors

Ultra-flexible versions

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60V AC.

Conductor

Pitch (mm)	Width (mm)	Max Conductor Resistance (Ω /km) at 20°C
		Ultra Flexible (25 μ m)
1.00	0.60 \pm 0.03	1500
Conductor thickness (typical value)		0.025 mm

Conductor plating

Tin	0.4 μ m min
Gold	0.3 μ m Ni min / 0.05 μ m Au

Insulation

Polyester insulation with flame retardant adhesive. White colour.

Connection schemes


With ZIF connectors

Reinforcement tape: Polyester B code.

Blue colour.



General drawing

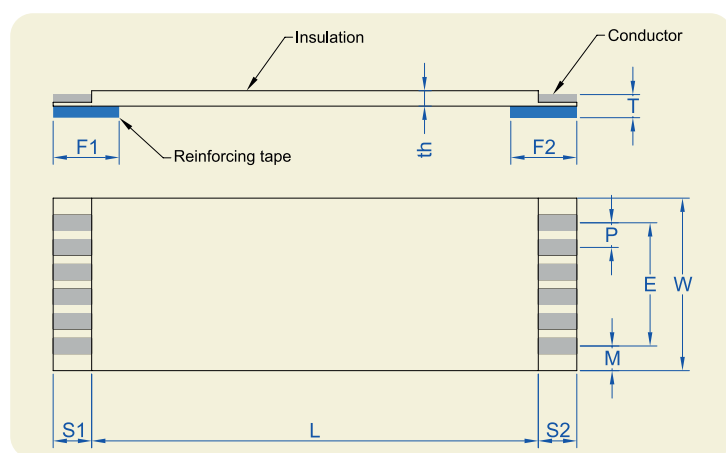


1.00 mm pitch Flat Flexible Cables 25 micron conductors

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


	1.00 mm pitch ± 0.08	
Number of conductors: N	4 to 60	
Span: E (mm)	$(N-1) \times 1.00 \pm 0.15$	
Width: W (mm)	$(N+1) \times 1.00 \pm 0.10$	
Margin: M (mm)	1.00 ± 0.20	
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)	
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)	
Insulated length: L (mm)	20 to 60 ± 2 61 to 100 ± 3 101 to 200 ± 4	201 to 3999 ± 5 4000 to 5999 ± 10 6000 to 9999 ± 15
Thickness at end of cable: T (mm)	0.30 ± 0.05 (only for ZIF connectors)	
Cable thickness: th (mm)	0.11 (typical value)	

Electrical properties

	Testing conditions	1.00 mm pitch
Dielectric Test (V AC) - Min	In air, during 1 minute	400
Current rating (A) - Max Ultra Flexible conductor	FFC at 23°C Allowable temperature rise : 40°C	0.5
Insulation resistance conductor to conductor (M Ω .m min)		10 at DC 400V
Continuity test	DC 3.0 V at 0.1mA	Passed
Impedance cond/cond balanced method (typical value)	FFC without shielding at 1MHz	90 Ω
Capacitance cond/cond balanced method (typical value)	FFC without shielding at 1KHz	30 pF/m

1.00 mm pitch Flat Flexible Cables 25 micron conductors

Other properties

	Testing conditions	Characteristics		
Heat resistance	136°C, 168 hours	Dielectric test Insulation resistance	Passed Passed	
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed	
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed	
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: Ø = 0.50 mm	Dielectric test Insulation resistance: After 500 cycles	Passed	
Flame resistance	UL 758	VW-1	Passed	
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed	
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed	
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius	5 mm	10 mm
		Ultra flexible	10 000 000	70 000 000



FLEX LIFE TEST



ULTRA-FLEXIBLE FLAT CABLE

UL compliance

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.

Marking definition on the cable:

FFC with L > 30 mm and W > 9mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"

1.00 mm pitch Flat Flexible Cables 25 micron conductors

Identification code

FFC 1.00 A 25/0200 E 4.0-4.0-08.0-08.0 U A BB/AU

Options:

Plating on conductors

-: tin plating

AU: gold plating

Reinforcement type (F1 & F2):

B: Polyester reinforcement

UL compliance:

A: Without UL marking

B: UL certified 20706

Conductor thickness:

U: Ultra Flexible (25 microns)

Reinforcement **length F2** in mm
(8 mm standard length)

Reinforcement **length F1** in mm
(8 mm standard length)

Strip **length S2** in mm (4 mm standard length)

Strip **length S1** in mm (4 mm standard length)

Insulation: **E**

Insulation length **L** in mm

Number of conductors: **N**

Processing form: **A or D**

Pitch **P** in mm

Flat **Flexible Cable**

Shielded Flat Flexible Cables

General characteristics

Temperature rating: up to 105°C.

Voltage rating: up to 60 V AC.

Conductor

Pitch (mm)	Width (mm)	Max Conductor Resistance (Ω /km) at 20°C
0.50	0.30 \pm 0.02	1460
1.00	0.70 \pm 0.03	550
Conductor thickness (Typical value)		0.05 mm

Conductor plating

Tin	0.4 μ m min
Gold	0.3 μ m Ni min / 0.05 μ m Au

Insulation

Polyester insulation with flame retardant adhesive.

White colour.

Shielding

Aluminium tape with Polyester insulation

Grey colour

Shielding is possible on flat cables with:

- a width W of 3.5 to 40 mm and a length L of 70 to 300 mm,

> For other dimensions (Please contact us for further information).

> Version S

Aluminium shielded version without grounding.

> Version G + grounded tracks (for example G2-5)

Aluminium shielded version with grounding (no limit for the number of grounds).



SHIELDED FLAT CABLE

Connection scheme

With ZIF connectors


Polyester reinforcement tape.

Blue colour.



Shielded Flat Flexible Cables


General drawing

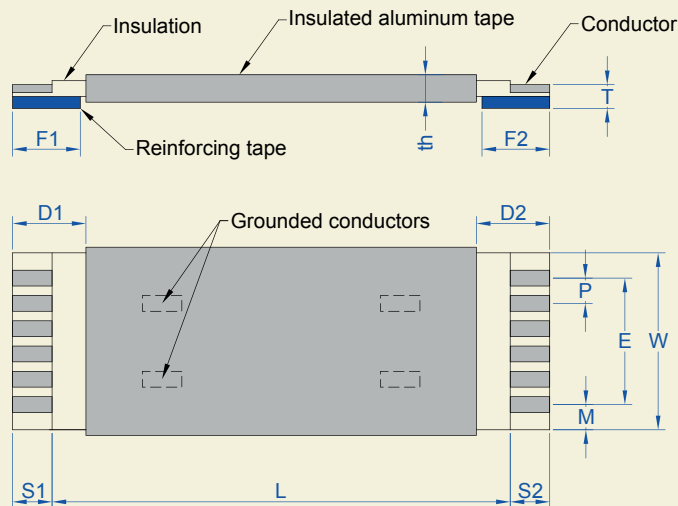

Processing forms


Type A

Reinforcements at both ends,
on the same side.



Type D

Reinforcements at both ends,
on opposing side.



Dimensions


Pitch: P (mm)	0.50 ± 0.05	1.00 ± 0.08
Number of conductors: N	6 to 80	4 to 60
Span: E (mm)	$(N-1) \cdot 0.50 \pm 0.07$	$(N-1) \cdot 1.00 \pm 0.15$
Width: W (mm)	$(N+1) \cdot 0.50 \pm 0.10$	$(N+1) \cdot 1.00 \pm 0.10$
Margin: M (mm)	0.50 ± 0.12	1.00 ± 0.20
Strip length: S1-S2 (mm)	2.00 to 10.0 ± 0.80 (standard value: 4 mm)	
Reinforcement length: F1-F2 (mm)	6.00 to 20.0 ± 2.00 (standard value: 8 mm)	
Shielding position: D1-D2(mm)	$(F1 \text{ or } F2 \text{ max} + 1) \pm 3$	
Insulated length: L (mm)	70 to 100 ± 3 101 to 200 ± 4 201 to 300 ± 5	
Thickness at end of cable: T (mm)	0.30 ± 0.05	
Cable thickness: th (mm)	0.22 (typical value)	0.28 (typical value)

Shielded Flat Flexible Cables

Electrical properties

	Testing conditions	Pitch	
		0.50	1.00
Dielectric Test (V AC) - Min	Conductor to conductor, during 1 minute	200	400
Current rating (A) - Max FFC at 23°C Allowable temperature rise: 40°C	Flexible conductor	0.50	1.00
Insulation resistance (MΩ.m min)	Conductor to conductor	10 at DC 200V	10 at DC 400V
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed
Impedance cond/cond balanced method (typical value)	FFC with shielding at 1 MHz	67 Ω	60 Ω
Impedance cond/shielding (typical value)	FFC with shielding at 1 MHz	45 Ω	40 Ω
Capacitance cond/cond balanced method (typical value)	FFC with shielding at 1 KHz	230 pF/m	220 pF/m
Capacitance cond / shielding (typical value)	FFC with shielding at 1 KHz	470 pF/m	500 pF/m

Other properties

	Testing conditions	Characteristics	
Heat resistance	113°C, 168 hours	Dielectric test Insulation resistance	Passed Passed
Thermal shock	(-55°C x 30 min → 25°C x 5 min → 85°C x 30 min → 25°C x 5 min) x 25 cycles	Dielectric test Insulation resistance	Passed Passed
Cold coiling	-40°C, 96 hours The sample is initially wound on a mandrel of 3 mm	At room temperature: Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by Abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: Ø = 0.50 mm	Dielectric test Insulation resistance: after 500 cycles	Passed
Flame resistance	UL 758	VW-1	Passed
Folding	The specimen shall be folded manually at 180°	Continuity after more than 20 times	Passed
Moisture resistance	60°C, 95% RH, 96 hours	Dielectric test Insulation resistance	Passed Passed
Flex-life Number of cycles (typical values)	Speed 100 cycles /min Flex-life test is performed at 23°C. 	Radius 10 mm	1 000 000 cycles

Shielded Flat Flexible Cables

UL compliance

UL compliance only for shielded FFC **without grounding**.

With code A: the products are UL compliant.

With code B: the products are UL certified style 20706 and shipped with UL labels.

Temperature rating: 105°C; Voltage rating: 60V AC.

AXON'Cable UL file number: E45046.

Marking definition on the cable:

FFC with $L > 30$ mm and $W > 9$ mm will have black printing on one side with the following text:

"AXON'CABLE –  – AWM – STYLE 20706 – 105C – 60V – VW-1"



SHIELDED FLAT FLEXIBLE CABLES

Shielded Flat Flexible Cables

Identification code

FFC 0.50 A 50 / 0200 E 4.0 - 4.0 - 08.0 - 08.0 F A BB / AU / G2 - 5

Shielding:**S:** Aluminium shielding without grounding**G:** Grounded Aluminium shielding + n° of grounded conductors**Options:**

Plating on conductors

-: tin plating

AU: gold plating**Reinforcement type (F1 & F2):****B** (for pitch of 0.5mm)**J** (for pitch of 1mm)**UL compliance:****A:** Without UL marking**B:** UL certified 20706**Conductor thickness:****F:** Flexible (50 microns)Reinforcement **length F2** in mm
(8 mm standard length)Reinforcement **length F1** in mm
(8 mm standard length)Strip **length S2** in mm (4 mm standard length)Strip **length S1** in mm (4 mm standard length)**Insulation:****E** (for pitch of 0.5mm)**B** (for pitch of 1mm)Insulation length **L** in mmNumber of conductors: **N**Processing form: **A or D**Pitch **P** in mmFlat **Flexible Cable**

Flat Cables with round pins AXOSTRIP™

AXOSTRIP™
is a flat cable with
round pins which
can be soldered or
inserted to achieve
board-to-board
interconnections.
This product
range has been
designed for static
applications.

Advantages

- High flexibility,
- High resistance to vibration and bending: reliable connection joint,
- Lower production costs: wave-soldered with the other components onto the PCB in the same operation,
- Lower purchasing costs since no connectors are required for type C and type A,
- Type B and type D are dismountable, only one connector is needed,
- Preparation wire stripping and cutting to length is not required,
- ZIF interface if needed (when flat conductors on one end).


General characteristics

Conductor

Pitch P (mm)	Diameter Ø (mm)	AWG	Maxi Conductor Resistance (Ω/km)
1.00	0.32 ± 0.02	28	250
1.25 1.27	0.32 ± 0.02	28	250
1.90 2.00	0.40 ± 0.02	26	145
2.54 5.08	0.51 ± 0.02	24	100

Conductor plating:

Tin	2 µm typical
-----	--------------

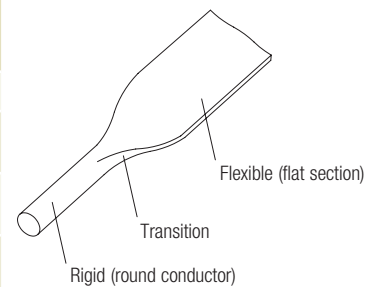

Insulation


Polyester, Polyimide or Aramid insulation with flame retardant adhesive.

	Polyester		Aramid	Polyimide
Code	B	H	W	Z
Operating temperature (°C)	-40 / +105	-40 / +105	-40 / +125	-40 / +125
Pitch P (mm)	1 to 1.27	1.9 to 5.08	1 to 5.08	



ARAMID INSULATED AXOSTRIP®

General drawing

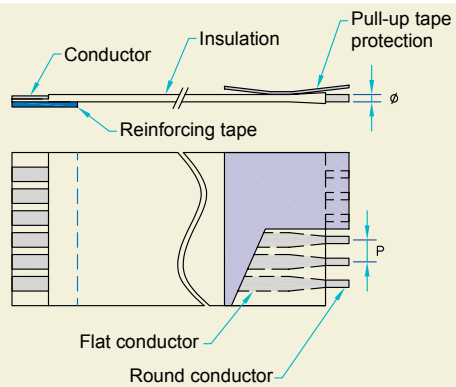

Processing forms

Type A or type D

	Type A	Type D
	Round conductors on both ends + pull-up protection	Flat conductors on one end and round conductors on the other end + pull-up protection
Design		
Reinforcing tape	-: no tape	L: Polyester tape (blue)
Pull-up protection	P: Polyester tape (clear/red)	
Use	Wave or manual soldering	ZIF connectors on reinforcement side Wave or manual soldering on the other side
Remove pull-up tape protection before using Pull-up tape improves conductor's protection during transportation and handling		

Type C or type B



	Type C	Type B
	Round conductors on both ends	Flat conductors on one end and round conductors on the other end
Design		
Reinforcing tape	-: no tape	L: Polyester tape (blue)
Use	Wave or manual soldering	ZIF connectors on reinforcement side Wave or manual soldering on the other side



STANDARD RFC TYPE B



STANDARD RFC TYPE C



Pull-up protective tape

Dimensions

Pitch: P (mm)	1.00 ± 0.10	1.25 ± 0.10	1.27 ± 0.10	1.90 ± 0.15	2.00 ± 0.15	2.54 ± 0.20	5.08 ± 0.20
Number of conductors: N	2 to 50	2 to 50	2 to 50	2 to 38	2 to 37	2 to 32	2 to 13
Span: E (mm)	(N-1)* 1.00 ± 0.15	(N-1)* 1.25 ± 0.15	(N-1)* 1.27 ± 0.15	(N-1)* 1.90 ± 0.15	(N-1)* 2.00 ± 0.15	(N-1) *2.54 ± 0.20	(N-1)* 5.08 ± 0.20
Cable width: W (mm)	(N+1)* 1.00 ± 0.15	(N+1)* 1.25 ± 0.15	(N+1)* 1.27 ± 0.15	(N+1)* 1.90 ± 0.20	(N+1)* 2.00 ± 0.20	(N+1)* 2.54 ± 0.20	(N)* 5.08 ± 0.20
Margin: M (mm)	1.00 ± 0.20	1.25 ± 0.20	1.27 ± 0.20	1.90 ± 0.20	2.00 ± 0.20	2.54 ± 0.20	2.54 ± 0.20
Insulated length: L (mm)	15 à 18 ± 1 19 à 60 ± 2 61 à 100 ± 3 101 à 200 ± 4 201 à 999 ± 5						
Standard wire gauge (AWG)	28	28	28	26	26	24	24
Pin diameter (mm) Ø	0.32±0.02	0.32±0.02	0.32±0.02	0.40±0.02	0.40±0.02	0.51±0.02	0.51±0.02
Flat conductor width: C (mm)	0.7	0.8	0.8	1.3	1.3	1.5	1.5
Flat conductor thickness (mm)	0.115	0.10	0.10	0.10	0.10	0.12	0.12
Stripping length: S1 (mm)	Standard value: 4 ± 0.75 for Type B or D				3.5 ± 0.75 for Type A or C		
Stripping length: S2 (mm)	Standard value: 3.5 ± 0.75						
Reinforcement length or pull-up protection: F1 (mm)	Standard value: 8 ± 2 for Type B or D				18 ± 2 for Type A		
Reinforcement length or pull-up protection: F2 (mm)	Standard value: 18 ± 2 (for Type A or D)						
Extremity thickness: T (mm)	0.30 ± 0.05 (for Type B or D)						

Other pitches and designs available on request.

Electrical properties

	Testing conditions	Pitch			
		1.00	1.25/1.27	1.90/2.00	2.54/5.08
Dielectric Test between conductors (V AC / 1 min)	In air, during 1 minute (MIL-STD-202 Method 301)	400	500	1250	1500
Voltage rating (V AC)	Non applicable	60	60	300	300
Current rating (A max)	RFC at 23°C Allowable temperature rise: 40°C	1.00	1.60	2.00	3.00
Insulation resistance conductor to conductor (M Ω .m min)	MIL-STD-202F Method 302 cond. B	10 at 400VDC	10 at 500VDC	10 at 500VDC	10 at 500VDC
Continuity test	DC 3.0 V at 0.1mA	Passed	Passed	Passed	Passed

Other properties

	Testing conditions	Characteristics	
Heat resistance	158°C, 168 hours for Aramid and Polyimide 136°C, 168 hours for Polyester	Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Cold coiling	-40°C, 4 hours	Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Moisture resistance	60°C, 95% RH, 96 hours	Visual inspection Dielectric test Insulation resistance	Passed Passed Passed
Wear by abrasion	Test following EN3475-503 Weight: 500 g Speed: 60 cycles/min Abrasion tool: = 0.45 mm	Dielectric test Insulation resistance: After 100 cycles	Passed Passed
Flame resistance	UL 758	VW-1	Passed

Identification code

RFC 2.54 A 08 /0075 H 3.5 - 3.5 - 18.0 - 18.0 S A P P

Reinforcement type (F2):

- : no tape (for Type B or C)
P: Pull-up tape protection for Type A or D

Reinforcement type (F1):

P: Pull-up tape protection (only for Type A)
L: Polyester reinforcement for Type B or D
- : no tape (only for Type C)

Tape marking:

A: Not marked

Conductor thickness

S (standard)

Reinforcement length or pull-up protection F2 in mm

0 mm standard length for Type B or C
18 mm standard length for Type A or D

Reinforcement length or pull-up protection F1 in mm

0 mm standard length for Type C
8 mm standard length for Type B or D
18 mm standard length for Type A

Strip length S2 in mm:

(3.5 mm standard length for Type A, B, C or D)

Strip length S1 in mm:

4 mm standard length for Type B or D
3.5 mm standard length for Type A or C

Insulation tape: H, B, W or Z (see above table)

H: Polyester W: Aramid (Nomex®)
B: Polyester Z: Polyimide (Kapton®)

Insulated length L (mm)

Number of conductors N

Processing form:

Type A, B, C or D

Pitch P in mm

Round to Flat Cable:

AXOSTRIP™

Bulk Flat Flexible Cables

FLEXLINK® is a range of flat flexible cables supplied on the reel for any application where space reduction and flexibility are the most important criteria.

They can be installed in printers and computers for consumer electronics, used for special machines or for board-to-board connections. Bulk flexible flat cables can also be used for the cabling of switch rotary connectors for airbag® modules. AXON' offers standard as well as custom designed versions for switch rotary connectors.

Standard bulk Flat Cables FLEXLINK®

Advantages

- Very flexible cables,
- Space saving cabling,
- Compatible with most crimp contacts.


General characteristics

- Temperature rating:
 - Polyester insulation: -40°C to +105°C
 - Polyimide insulation: -90°C to +200°C
- Standard packaging:
 - 150 m for Polyester insulated flat cables,
 - 20 m for Polyimide insulated flat cables,
- Bare copper or tin plated copper conductors,
- Polarization on track 1 if required.



BULK FLAT FLEXIBLE CABLE PRODUCTION

General drawing

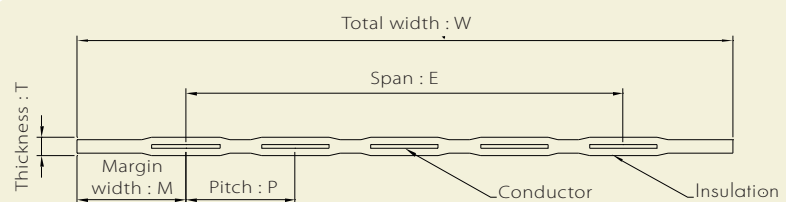


Dimensions

Conductor reference	S	M	L
Pitch P (mm)	1.27	2.54	2.54
Total width W (mm)	1.27 x (N+1)	2.54 x (N+1)	2.54 x (N+1)
Margin width M (mm)	1.27	2.54	2.54
Cable thickness T (mm) for Polyester version	0.28	0.28	0.28
Cable thickness T (mm) for Polyimide version	0.20	0.20	0.20

Electrical properties

Conductor characteristics		S	M	L
Current rating (A)		0.9 max.	3.0 max.	
Voltage rating (V A.C.)		300 max.		
Insulation resistance conductor to conductor (MΩ. m min)		10 at 500 V DC		
Capacitance (typical value at 1KHz)	Cb (balanced, pF/m)	52	40	33
	Co (unbalanced, pF/m)	75	56	46
Impedance (typical value at 1KHz)	Zb (balanced, Ω)	162	157	180
	Zo (unbalanced, Ω)	110	110	130
Resistance (Ω/km max) at 20°C		410	194	240

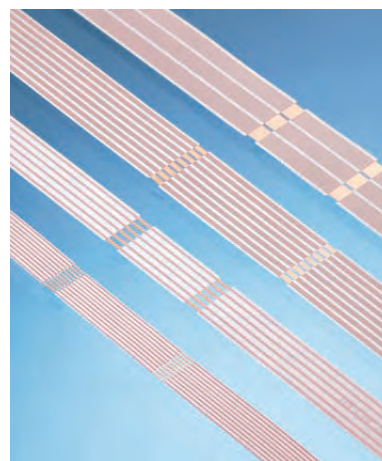

BULK FLAT CABLE

Special assemblies

Flexlink® cable with crimped contacts



Connector assemblies on request.

Identification code

M 1 S P 55

NUMBER OF CONDUCTORS

For 1.27 pitch: M insulation: 4 to 55
H insulation: 4 to 48

For 2.54 pitch: M insulation: 2 to 27
H insulation: 2 to 23

CONDUCTOR MATERIAL

T = Tin plated
U = Bare copper
P = Polarization: First conductor: tin plated.
Others: bare copper.

CONDUCTOR SIZE

For 1.27 pitch: S = 0.66 x 0.076
For 2.54 pitch: L = 1.27 x 0.076
M = 1.57 x 0.076

PITCH

1 = 1.27 mm
2 = 2.54 mm

INSULATION MATERIAL

M = Polyester
H = Polyimide (only available with bare copper conductors)

Custom-designed cables for switch rotary connectors

General characteristics

Conductor

Thickness: between 0.035 and 0.20 mm.

Width: between 0.80 and 10 mm.

Copper or tin plated copper.

Different conductor widths can be mixed in the same hybrid cable.

Insulation


Polyester insulation with flame retardant adhesive.

Processing forms


Hotbar soldering




Electrical welding

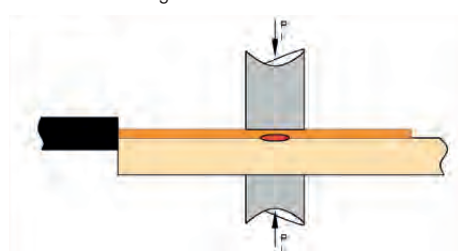

Ultrasonic welding

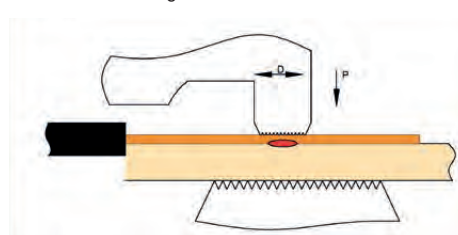

P : PRESSURE - T : TEMPERATURE - I : CURRENT - D : MOVEMENT

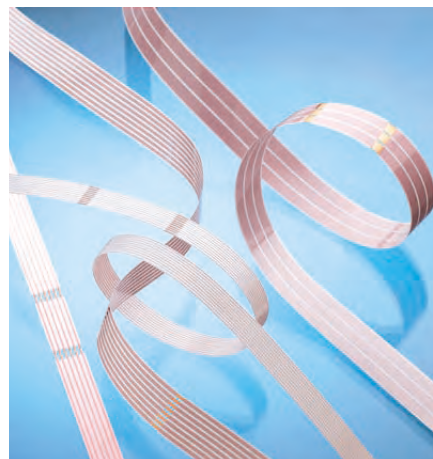

BULK FLAT CABLE



CABLE ASSEMBLY FOR SWITCH ROTARY CONNECTOR

Specific tests

- Flexion,
- Torsion,
- Dry heat or with humidity,
- Salt spray,
- Cassette rotation test (between -40°C/+90°C with or without humidity).

Don't hesitate to contact us for specific requirements.

Flat Cable Assemblies

FDC-Flat Display Connections AXOLINK™

FDC-Flat Display Connections are made from AXOJUMP™ Flat Flexible Cables and industry standard display connectors such as DF-9, DF-19, FI-SE or FI-X.

Advantages

Small dimensions: low profile, narrow width design,
Low cost, high reliability,
Excellent flexibility and flex-life.

General characteristics

0.50 mm, 1.00 mm and 1.25 mm pitches,
Standard FFC, ZIF interface
FDC with DF-9 cable assemblies are compliant with VESA (Video Electronics Standard Association) FPD1-1 (Flat Panel Display Interface),



31 WAY FDC WITH DF-9 CONNECTOR

Product availability

	Connector type			
	DF-9**	DF-19*	FI-SE*	FI-X*
FFC type				
0.50 (mm)	x			
1.00 (mm)		x		x
1.25 (mm)			x	
Number of conductors				
14		x		x
20		x	x	x
30		x		x
31	x			
41	x			

*Standard version is shielded for these connector types. Non shielded versions also available.

**Standard version is non-shielded (shielded version on request).

All versions can be supplied with custom folds.

Processing forms

■ M: Header
■ F: Receptacle





DF9

Non-shielded version (FDC), Shielded version on request.

AMF01 	BFM08 	AMM15 	CMZ22
AMM02 	BMM09 	AFF16 	CFZ23
AFF03 	BFF10 	BMF17 	CFZ24
AMF04 	AMM11 	BMM18 	DMZ25
BMM05 	AFF12 	BFF19 	DMZ26
BFF06 	AMF13 	BMF20 	DFZ27
BMF07 	AFM14 	CMZ21 	DFZ28

DF19




Non-shielded version (FDC), shielded version (FDB).

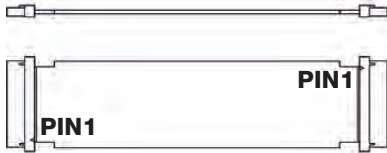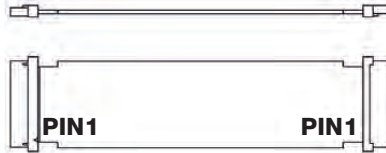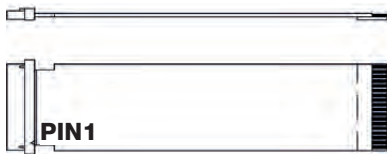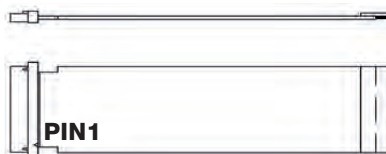EMM29**EMM30****FMZ31****FMZ32**

FDC WITH DF-19 CONNECTOR

FI-SE





Non-shielded version (FDC), shielded version (FDB).

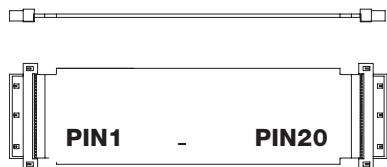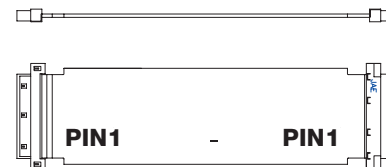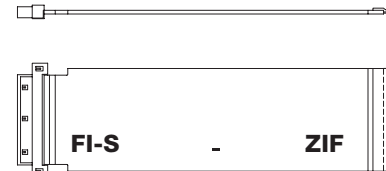EMM33**EMM34****FMZ35****FMZ36**

41 WAY FDC WITH DF-9 CONNECTOR

FI-X


Non-shielded version (FDC), shielded version (FDB).

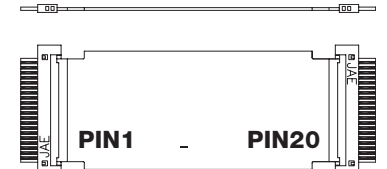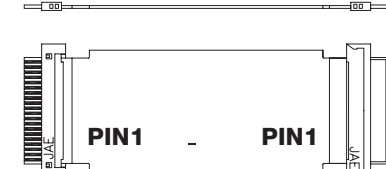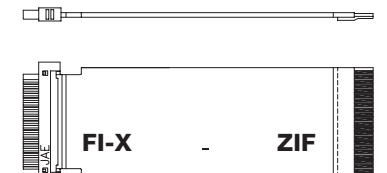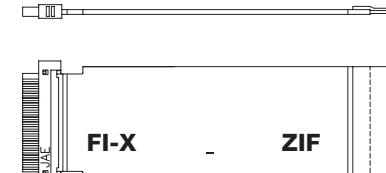EMM37**EMM38****FMZ39****FMZ40**


41 WAY FDC WITH DF-9 CONNECTOR

Dimensions


DF-9

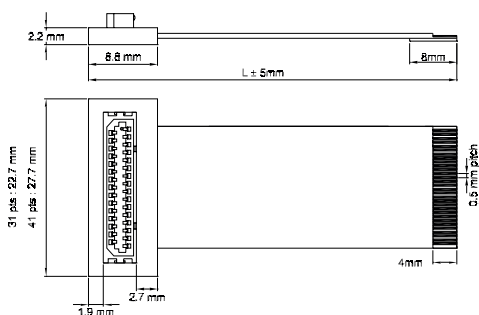


DF-19

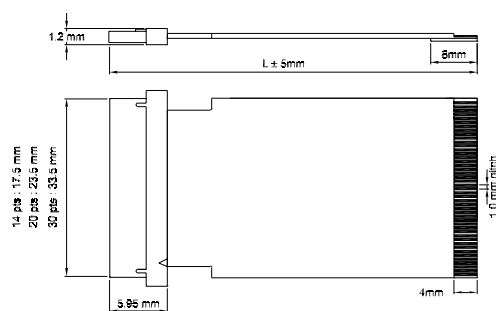

FI-SE

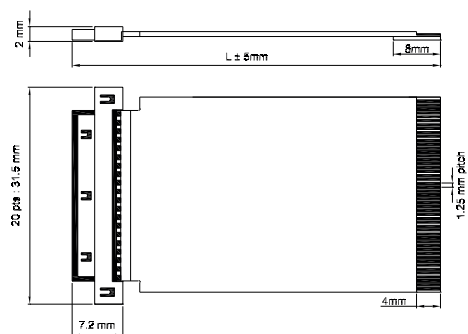

FI-X

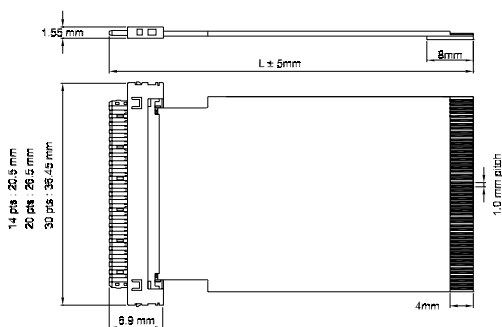

Where there is a ZIF connector at one end, the standard number of ways for the ZIF will be 2 more than the DF-19/FI-SE/FI-X connector at the other end (for DF-9 versions the number of ways is equal for both connectors).

If same number of ways (14, 20 or 30) is required for the ZIF on DF-19/FI-SE/FI-X versions, AXON' can punch the ZIF end to ensure compatibility.

Off-the-shelf products

AXON' keeps several standard lengths of Flat Flexible Cables in stock with 31 or 41 conductors for the different assembly types to assure a short delivery time. Immediately after receipt of your order, the termination process is started. Any connector configuration shown on the following pages is possible.

Standard AXOLINK™ assembly lengths


- 76 mm
- 102 mm
- 152 mm
- 203 mm
- 254 mm

Processing forms


Connection schemes

Only for
DF-9


A




B



C




D




Only for
DF-19, FI-SE and FI-X

E



F



For "ZIF" ending of DF-19 / FI-SE / FI-X versions, connector ways = number of conductors + 2.

Quick prototyping for electrical validation

AXON' can provide small quantities of AXOLINK™ prototypes for electrical validation. Dependent on the availability of cable, AXON' may propose the exact length required or a slightly different length to provide the quickest response.

Special products

AXON' can also provide special AXOLINK™ products, in particular:

- special number of conductors
- special markings,
- any special length,
- moisture protection of the assembly,
- folded versions,
- ferrites on the assembly,
- shielding,
- shielding with grounding,
- gold plating: for DF-19/FI-SE and FI-X the gold plating available on the ZIF end.

Identification code

FDC 41 / 0100 A M M 02

Connection scheme

1 through 40 as defined
on the connection scheme

Connector type C2

M: MALE (Header) - DF-9 / DF-19 / FI-SE / FI-X
F: FEMALE (Receptacle) - DF-9 only
Z: ZIF

Connector type C1

M: MALE (Header) - DF-9 / DF-19 / FI-SE / FI-X
F: FEMALE (Receptacle) - DF-9 only

Connection type

A: connector-connector - same face
B: connector-connector - opposite face
C: DF-9 to ZIF - same face
D: DF-9 to ZIF - opposite face
E: connector - connector
(only for DF-19 / FI-SE / FI-X)
F: connector - ZIF (only for DF-19 / FI-SE / FI-X)

Length

End to end length including connector (mm)
(minimum length : 52 mm)

Number of conductors

31 or 41 for DF-9
14, 20 or 30 for DF-19
20 for FI-SE
14, 20 or 30 for FI-X

FDC = Non shielded version


(DF-9, DF-19, FI-SE, FI-X connectors)

FDB = Shielded version

(DF-9, DF-19, FI-SE, FI-X connectors)

Any special version on request

Flat Display Connections for High Speed transmission: LVDS

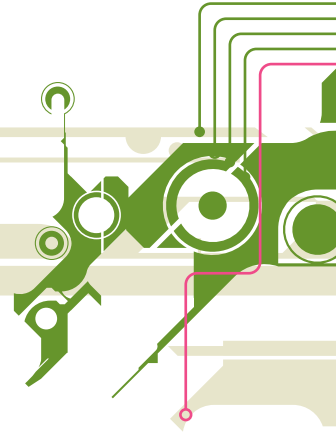

FDC 100® is a 100 ohm shielded Flat Cable Assembly, designed for connecting HD and ultra high definition flat displays.

The FDC 100® is the connection between the motherboard to the display on larger HD television displays (LCD LED, plasma and LCD monitors).

Advantages

- Connector with a simple connection system: no need to have an extra metal link between the PCB connector and the cable shield.
- Foldable to make installation easier.
- Small size.
- High flexibility.
- 100 Ω differential impedance.
- Excellent high speed transmission: up to 3Gbps.

General characteristics

- Made with a shielded flat cable only or a shielded flat cable connected with an innovative connector designed by AXON'.
- 21, 31, 41 and 51 way 0.50 mm pitch shielded flat cable with gold plated conductor ends, terminated with connectors compatible with the board-mount FI-R connectors.
- Compatible with Molex and FH41 Hirose connectors.




FDC100® LVDS

General drawing

FDC 100® - 0.50 mm pitch

Connector compatible with FI-R PCB mounted connector.

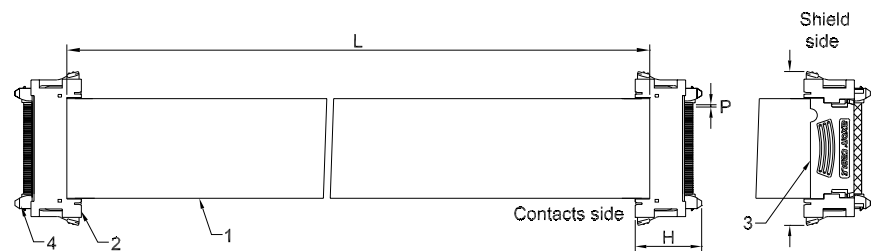

FDC 100® with FI-R connectors

Dimensions

Items	Materials and Finishes	
1	FFC	PET, copper, contact, gold plating
2	Connector – Housing	AXON'connector mating to FI-R
3	Connector – Cover	
4	Clip	


Items	Specifications			
Number of conductors N	21	31	41	51
Pitch P	0.50 +/- 0.05 mm			
Length L	L +/- 5 mm			
Connector height H	14.95 mm			
Connector width G	25.30 mm	30.30 mm	35.30 mm	40.30 mm

Electrical properties for cable


Contact resistance	< 40 milliohms max
Insulation resistance M Ω .m min resistance	10 at 200 V DC conductor to conductor
Dielectric test (V AC -min)	200 VAC RMS (for 1 minute) Dielectric test (V AC min)
Operating voltage	30 VAC max.
Impedance	100 +/- 10 ohms
Operating temperature	-40°C to +80°C
Humidity resistance	48H – 85°C / 95% humidity
Vibration resistance	OK (Acc 4g/ shock resistance 6g 10 ms)
Interconnection with FI-R connectors.	20 mating cycles: no change of electrical parameters.

Eye pattern FDC 100® LVDS (for 500 mm length cables)


At 50 Mbit/s

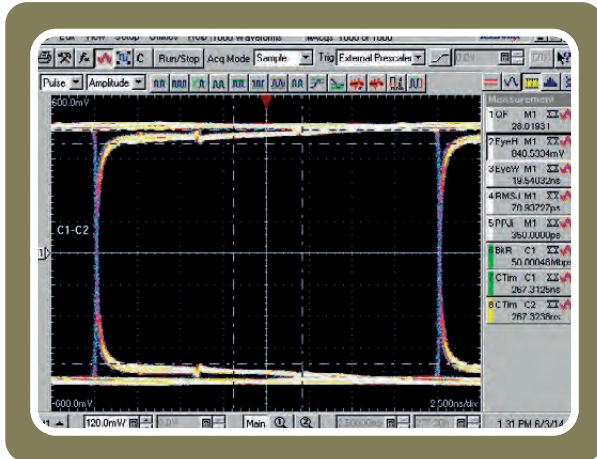

At 500 Mbit/s

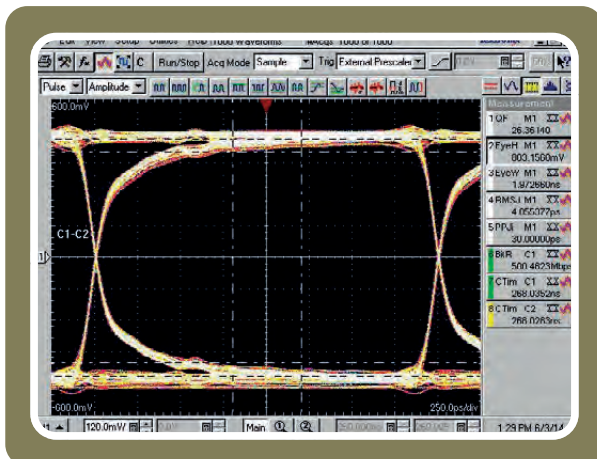


At 1000 Mbit/s

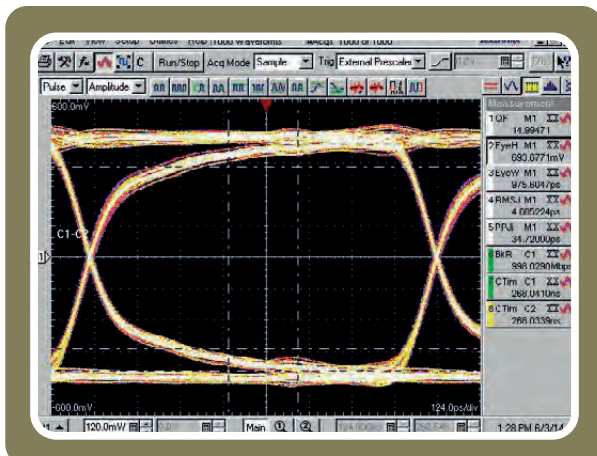

0.5 MM FDC 100® FLEXIBLE LVDS


FDC 100® for ZIF connectors

Molex 502231 - Hirose FH41,
Molex 501786 -Molex 501864

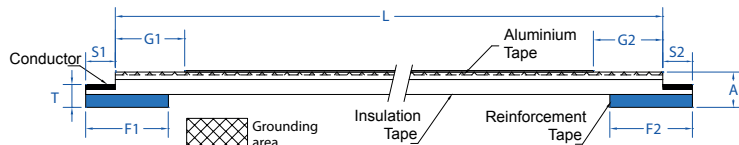


Pitch: P	0.50 ± 0.05 mm
End thickness: T	0.30 ± 0.05 mm
Thickness grounding Area: A	0.50 ± 0.05 mm
Insulated length: L	45 to 60 ± 2 mm
	61 to 100 ± 3 mm
	101 to 200 ± 4 mm
	201 to 1500 ± 5 mm

Version for Molex 502231

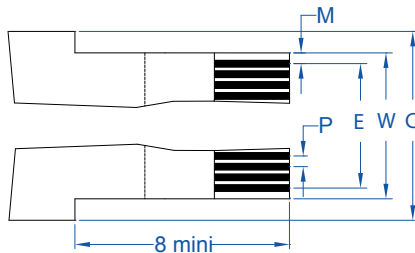


Pitch: P	0.50 ± 0.05 mm
Span: E	(N-1)*0.50 ± 0.05 mm
Width: W	(N+1)*0.50 ± 0.07 mm
Width: C	(N+5)*0.50 ± 0.15 mm
Margin: M	0.5 ± 0.08 mm
Strip length: S1/S2	2.2 ± 0.5 mm
Grounding length: G1/G2	6 ± 2.0 mm
Reinforcement length: F1/F2	7 ± 1.5 mm

Version for Hirose FH41

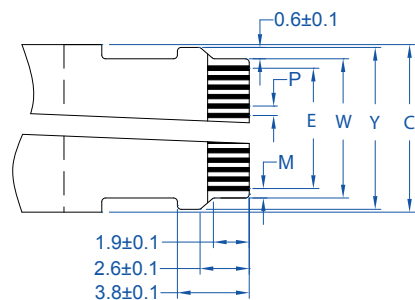

Pitch : P	0.50 ± 0.05
Span: E	(N-1)*0.50 ± 0.05
Width: W	(N+1)*0.50 ± 0.07
Width: C	(N+5)*0.50 ± 0.15
Margin: M	0.5 ± 0.08
Punching: Y	(N+1)*0.50+1.2 ± 0.10
Strip length: S1/S2	2.1 ± 0.5
Grounding length: G1/G2	6 ± 2.0
Reinforcement length: F1/F2	8 ± 1.5



Version for Molex 501786 / 501864

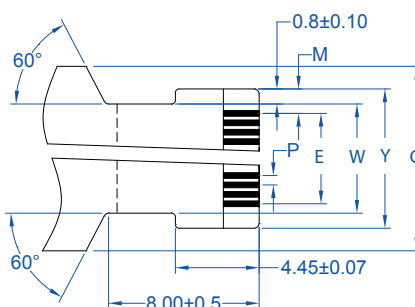

Pitch : P	0.50 ± 0.05
Span: E	(N-1)*0.50 ± 0.06
Width: W	(N+1)*0.50 ± 0.05
Width: C	(N+9)*0.50 ± 0.2
Margin: M	1.3 ± 0.06
Punching: Y	(N+1)*0.50+1.6 ± 0.04
Strip length: S1/S2	1.9 ± 0.5
Grounding length: G1/G2	6 ± 2.0
Reinforcement length: F1/F2	7.7 ± 1.5

FDC 100® for ZIF connectors

Version for Molex 503908

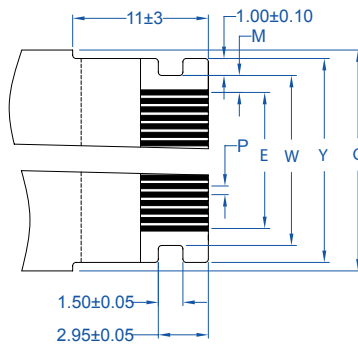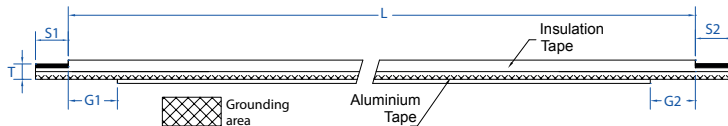

Pitch : P	0.50 ± 0.05
End thickness: T	0.30 ± 0.05
Insulated length: L	45 to 60 ± 2
	61 to 100 ± 3
	101 to 200 ± 4
	201 to 1500 ± 5





Pitch : P	0.50 ± 0.05
Span: E	(N-1)*0.50 ± 0.05
Width: W	(N+3)*0.50 ± 0.05
Width: C	(N+9)*0.50 ± 0.15
Margin: M	2.0 ± 0.08
Punching: Y	(N+7)*0.50 ± 0.04
Strip length: S1/S2	4.0 ± 0.5
Grounding length: G1/G2	6 ± 2.0

Other specific shapes for connectors with locking systems available on request.

Electrical properties

Insulation resistance	10 Mohm.m min (200 VDC)
Impedance	100 +/- 10 ohms
Dielectric withstanding voltage conductor to shield	200 VAC RMS (for 1 minute)
Operating voltage	30 VAC max
Operating temperature	-40°C to +80°C
Humidity resistance	48H -85°C / 95% humidity

Special designs

		501786 501864	503908	
Pitch: P (mm)	0.50	0.50	0.50	0.50
FFC Drawing				

Identification code

FDC100

41

A

450

A

-

LVDS: -

FI-R/FI-R connector: **A**
ZIF Molex 502231: **B**
Hirose FH41: **C**
Molex 501786, 501864: **D**
Molex 503908: **E**

Length
(mm)

Processing form: Type A

Number of conductors
FI-R: 21, 31, 41, 51
502231: 15, 24, 33
FH41: 15, 20, 28, 31, 40, 50, 68
501786, 501864: 30, 50, 80
503908 : 41, 51

Flat Display Cable

Flat Display Connections for High Speed (LVDS): FDC 100® Flexible version


Compared to a standard LVDS design, the flexible version of the FDC 100® provides better insulation, greater flexibility and easier integration into the customer's equipment.

I) FDC 100® with FI-R connectors

Processing forms


Type A

Contact area on same side.

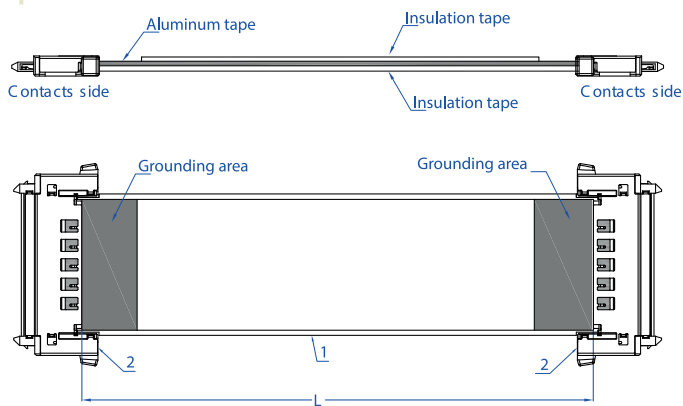

Type D


Contact area on opposite side.

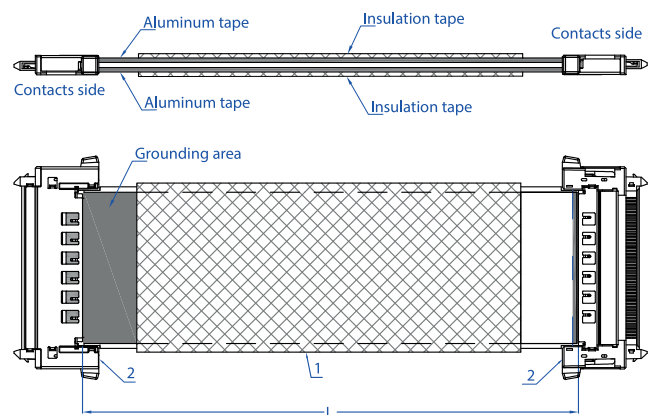

Dimensions

Items	Materials and Finishes	
1	FFC	PET, copper, contact, gold plating
2	Connector – Housing	Connector mating to FI-R

Items	Specifications	
Number of conductors N	41	51
Pitch P	0.50 +/- 0.05 mm	
Length L	L +/- 5 mm	
Connector height H	15.20 mm	
Connector width G	35.00 mm	40.0 mm



Electrical properties for cable


Contact resistance	< 40 milliohms max
Insulation resistance M Ω .m min resistance	10 at 200 V DC conductor to conductor
Dielectric test (V AC -min)	200 VAC RMS (for 1 minute) Dielectric test (V AC min)
Operating voltage	60 VAC max.
Impedance	100 +/- 10 ohms
Operating temperature	-40°C to +80°C
Humidity resistance	48H – 85°C / 95% humidity
Vibration resistance	OK (Acc 4g/ shock resistance 6g 10 ms)
Interconnection with FI-R connectors.	20 mating cycles: no change of electrical parameters.

II) FDC 100® with ZIF connectors

Processing forms

Type A


Reinforcements at both ends, on the same side.

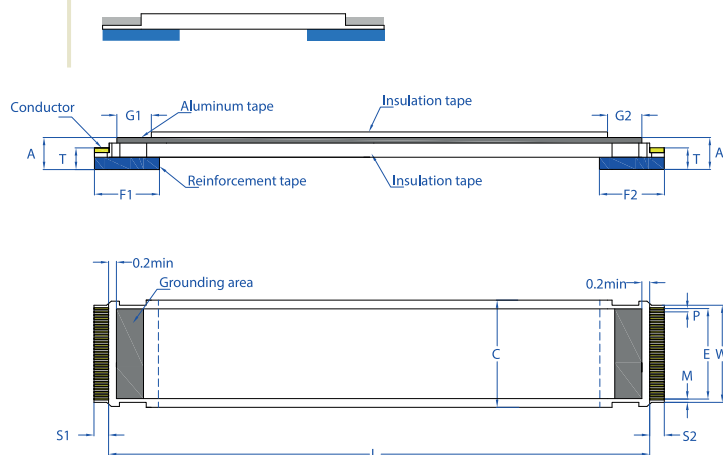

Pitch: P	0.50 ± 0.05 mm
End thickness: T	0.30 ± 0.05 mm
Thickness grounding Area: A	0.50 ± 0.05 mm
Insulated length: L	45 to 60 ± 2 mm
	61 to 100 ± 3 mm
	101 to 200 ± 4 mm
	201 to 900 ± 5 mm


Type D

Reinforcements at both ends, on opposing side.

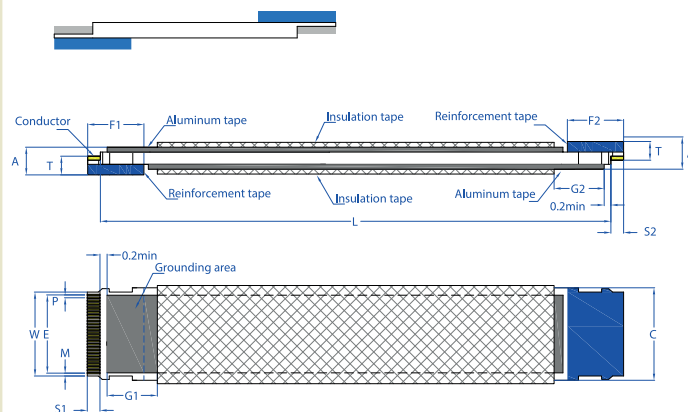


Pitch: P	0.50 ± 0.05 mm
End thickness: T	0.30 ± 0.05 mm
Thickness grounding Area: A	0.50 ± 0.05 mm
Insulated length: L	45 to 60 ± 2 mm
	61 to 100 ± 3 mm
	101 to 200 ± 4 mm
	201 to 500 ± 5 mm

Version for Molex 502231

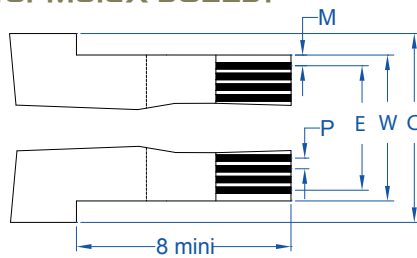


Pitch: P	0.50 ± 0.05 mm
Span: E	(N-1)*0.50 ± 0.05 mm
Width: W	(N+1)*0.50 ± 0.07 mm
Width: C	(N+5)*0.50 ± 0.15 mm
Margin: M	0.5 ± 0.08 mm
Strip length: S1/S2	2.2 ± 0.5 mm
Grounding length: G1/G2	6 ± 2.0 mm
Reinforcement length: F1/F2	7 ± 1.5 mm

Version for Hirose FH41 / FH48

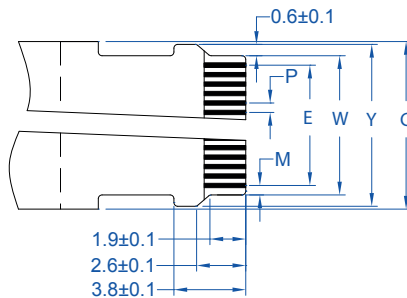

Pitch : P	0.50 ± 0.05
Span: E	(N-1)*0.50 ± 0.05
Width: W	(N+1)*0.50 ± 0.07
Width: C	(N+5)*0.50 ± 0.15
Margin: M	0.5 ± 0.08
Punching: Y	(N+1)*0.50+1.2 ± 0.10
Strip length: S1/S2	2.2 ± 0.5
Grounding length: G1/G2	6 ± 2.0
Reinforcement length: F1/F2	7 ± 1.5

Version for Molex 501786 / 501864

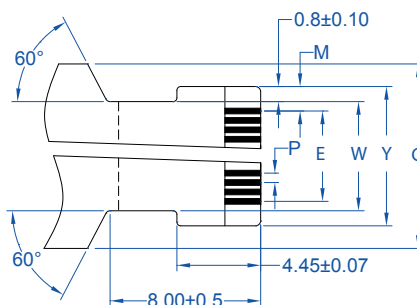

Pitch : P	0.50 ± 0.05
Span: E	(N-1)*0.50 ± 0.06
Width: W	(N+1)*0.50 ± 0.05
Width: C	(N+9)*0.50 ± 0.2
Margin: M	1.3 ± 0.06
Punching: Y	(N+1)*0.50+1.6 ± 0.04
Strip length: S1/S2	1.9 ± 0.5
Grounding length: G1/G2	6 ± 2.0
Reinforcement length: F1/F2	7.7 ± 1.5

Other specific shapes for connectors with locking systems available on request.





Electrical properties

Insulation resistance	10 Mohm.m min (200 VDC)
Impedance	100 +/- 10 ohms
Dielectric withstanding voltage conductor to shield	200 VAC RMS (for 1 minute)
Operating voltage	60 VAC max
Operating temperature	-40°C to +80°C
Humidity resistance	48H -85°C / 95% humidity



0.5 MM FDC 100® FLEXIBLE LVDS

Special designs

		501786 501864	503908	
Pitch: P (mm)	0.50	0.50	0.50	0.50
FFC Drawing				

Identification code

FDC100F	41	A	450	A	-	
						LVDS: -
						FI-R/FI-R connector: A ZIF Molex 502231: B Hirose FH41: C Molex 501786, 501864: D Molex 503908: E
						Length (mm)
						Processing form: Type A or D
						Number of conductors FI-R: 41, 51 502231: 15, 24, 33 FH41: 15, 20, 28, 31, 40, 50, 68 501786, 501864: 30, 50, 80 503908 : 41, 51
						Flat Display Cable Flexible version



© 2009 - AXON'CABLE-Released MARCH 2022 / H - All rights reserved
AXOJUMP™, AXOSTRIP™, FLEXLINK®, FDC 100®, AXOLINK™:

Registered trademarks of AXON'CABLE - Photos: Nickelkrome

All information contained in this brochure can be changed without prior notice

>> BRAZIL

**AXON' CABLE INDUSTRIA
E COMÉRCIO LTDA**
ED. CORPORATE LEAD AMÉRICAS
BARRA DA TIJUCA
AV. DAS AMÉRICAS, 500 - BL. 9
VICTORY - SALA 208
RIO DE JANEIRO, RJ, CEP 22.640-100
TEL.: +55 21 3596-8002
e-mail: salesbrazil@axon-cable.com

>> CANADA

AXON' CABLE INC. CANADIAN OFFICE
MONTREAL, QUEBEC
TEL.: +1 514 898 2044
e-mail: sales@axoncable.com

>> CHINA

AXON' INTERCONNECT LIMITED
HIGH TECH INDUSTRIAL PARK,
CHANG BAO XI ROAD
RONGGUI, 528306
SHUNDE, GUANGDONG
TEL.: +86 757 2838 7200
FAX: +86 757 2838 7212
e-mail: sales@axon-interconnect.com

>> GERMANY

AXON' KABEL GMBH
POSTFACH 1131 - 71201 LEONBERG
HERTICHSTR. 43 - 71229 LEONBERG
TEL.: +49 7152-97992-0
e-mail: sales@axon-cable.de

>> HUNGARY

AXON' KÁBELGYÁRTÓ KFT.
KÜLSŐ-SZEGEDI ÚT 104.
KECSKEMÉT, H-6000
TEL.: +36 76 508 195
FAX: +36 76 508 196
e-mail: axon@axon-cable.hu

>> INDIA

**AXON' INTERCONNECTORS
AND WIRES PVT LTD**
PLOT NO.102, KIADB HITECH
DEFENSE AND AEROSPACE PARK
UNACHUR VILLAGE, B.MARENAHALLI,
JALA HOBLI, BUDIGERE POST
BANGALORE NORTH TALUK,
BANGALORE URBAN-562 129
KARNATAKA
TEL.: +91(0) 806 816 2966
FAX: + 91 (0) 806 816 2999
e-mail: sales@axon-cable.in

**DHRUV AXON INTERCONNECT
PRIVATE LTD**

PLOT NO.102, SW PART-A,
KIADB HITECH DEFENSE AND AEROSPACE
PARK, UNACHUR VILLAGE, B.MARENAHALLI,
JALA HOBLI, BUDIGERE POST, BANGALORE
NORTH TALUK, BANGALORE URBAN-562 129.
KARNATAKA
(JOINT VENTURE - SPECIALISED IN OFFSET)

>> JAPAN

AXON' CABLE JAPAN OFFICE
2F-B Marusa Bldg, 1-3-16 Minami Chitose
Nagano-shi, Nagano, 380-0823
TEL./FAX: +81 26 217 6728
e-mail: axon-japan@axon-cable.com

>> LATVIA

AXON' CABLE SIA
VIŠŅU IELA, 21 C
DAUGAVPILS - LV-5410
TEL.: +371 6540 78 91
e-mail: axon@axoncable.lv

>> MEXICO

AXON' INTERCONEX, S.A. DE C.V.
AV. PEÑUELAS 21-A1.
INDUSTRIAL SAN PEDRITO PEÑUELAS
QUERÉTARO PARK
76148 QUERÉTARO, QRO. - MÉXICO
TEL: +52 442 215 2713
e-mail: axon-mexico@axoncable.com

>> SINGAPORE

AXON' CONNECT PTE LTD
3 ANG MO KIO STREET 62,
#04-02 LINK@AMK,
SINGAPORE 569139
TEL: +65 62 50 31 69
e-mail: sales.singapore@axon-cable.com

>> SPAIN

AXON' CABLE SPANISH OFFICE
C/CAPITÁN HAYA, N°1, PLANTA 15
28020 MADRID
TEL.: +34 91 418 43 46
FAX: +34 91 556 28 80
e-mail: sales@axon-cable.com

>> UNITED KINGDOM

AXON' CABLE LTD
AXON' AGORA
ADMIRALTY PARK - ROSYTH DUNFERMLINE
FIFE KY11 2YW
TEL.: +44 1383 421500
e-mail: sales@axon-cable.co.uk

>> USA

AXON' CABLE INC.
1316 N PLUM GROVE ROAD
SCHAUMBURG, IL. 60173
TEL.: +1 847 230 7800
e-mail: sales@axoncable.com

VISIT OUR WEBSITE
www.axon-cable.com



FOLLOW US



HEADQUARTERS

>> France

>> AXON' CABLE S.A.S.

2 ROUTE DE CHALONS EN CHAMPAGNE - 51210 MONTMIRAIL
TEL : +33 3 26 81 70 00
e-mail : sales@axon-cable.com - <http://www.axon-cable.com>

axon'
cable & interconnect